



攜帶式八段變速磁性鑽孔攻牙機

PORTABLE ELECTROMAGNETIC DRILL & TAPPING MACHINE

This machine is with eight speeds for changing, and the operator can choose the speed freely.

本機台擁有八段變速，
可使操作員更稱心快意選擇轉速

AE-260

特點 Feature
採單相電壓
DC直流無刷馬達
Adopt single-phase voltage
DC brushless motor



特點

1. 不必使用碳刷，所以機械運轉時不會產生碳粉塵。
2. 此馬達沒有整流子裝置，馬達故障率低。
3. DC直流無刷馬達的運轉聲音很小，其沒有一般碳刷馬達運轉時產生的噪音。
4. 此機械可以使用單相電壓 (220V或110V)，使用者較容易找到單相電源插座來使用。
5. 擁有八段轉速 (最高轉速698轉，最低轉速46轉)，對於加工物材質的軟硬及孔徑的大小，能使操作員更稱心快意來選擇轉速。
6. 鑽孔套筒、攻牙用扭力夾具皆為快速接頭設計，能快速更換，增進工作效率。
7. 攻牙用扭力夾具，能安全控制扭力大小及深度，可防止攻牙刀扭斷。

Features

1. No carbon brush is required, so there is no carbon dust during machine running.
2. The motor is without rectifier device, so the failure rate is low.
3. The running sound of the DC brushless motor is very low, it's not like the carbon brush motor produce noise.
4. The machine can use single-phase voltage (220V or 110V), so it's easier for user to find a single-phase power socket.
5. With eight speeds (max. 698 rpm, mini. 46 rpm), it's good for the operator to choose the speed according to the hardness of the workpiece and the size of the hole.
6. Drilling sleeves and tapping torsion fixture are designed with quick connectors, which can be quickly replaced to improve work efficiency.
7. The torsion fixture for tapping can safely control the torsion and depth to prevent the tapping tool from breaking.



升山工業股份有限公司
TSYR TZUN INDUSTRIAL CO., LTD.

台中市412大里區國中路481號
No. 481, Kuochung Rd., Tali District., Taichung City 412, Taiwan

TEL: 04-24067770
FAX: 04-24064033

E-mail: tsyrtzun@ms32.hinet.net
<https://www.tsyrtzun.com>





攜帶式八段變速磁性鑽孔攻牙機

PORTABLE ELECTROMAGNETIC DRILL & TAPPING MACHINE

AE-260

直流無刷馬達

DC brushless motor

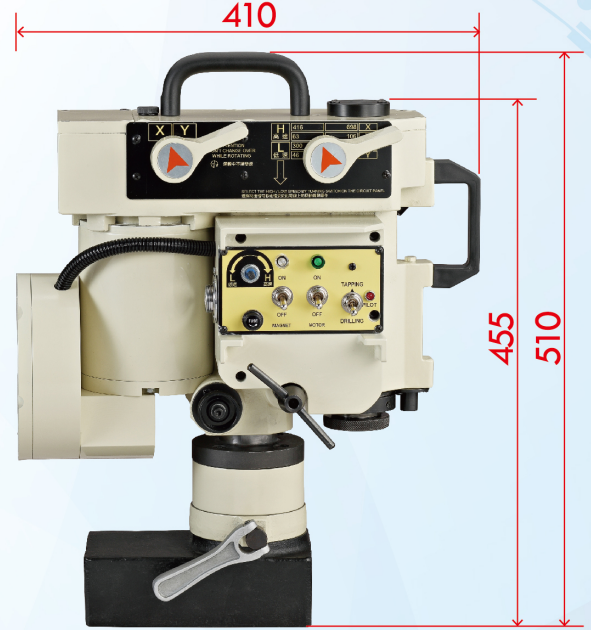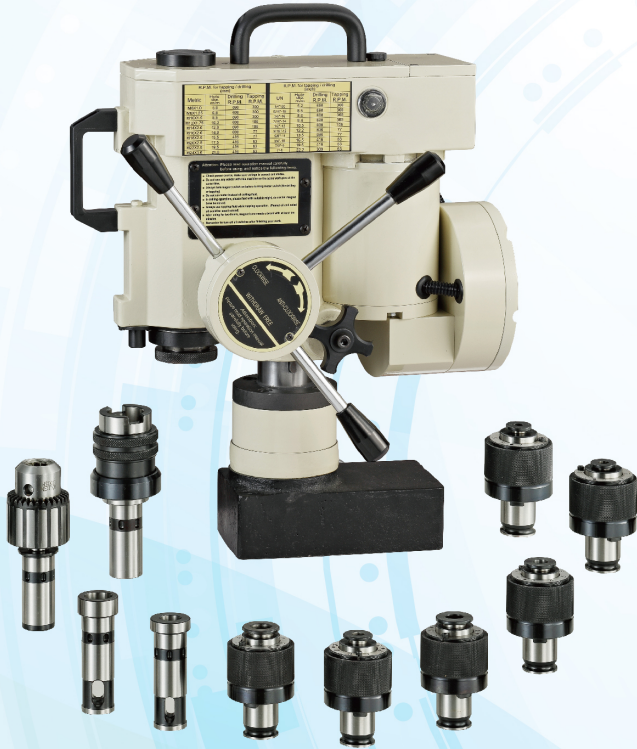

型號 Model	鑽孔能力 Drill Capacity	攻牙能力 Tapping Capacity	電源 (單相) Power (AC)	馬力 HP	轉速 R.P.M.	進刀行程 Feeding Stroke	機體升降行程 Body Stroke	前後移動 Transversal Move	回轉度 Turning Degree	磁鐵尺寸 Magnetic	最大磁力 Magnetic Force	高度 Height	扭力夾具標準附件 Torsion Fixture Standard Fitting	鑽孔套筒標準附件 Drill Sleeve Standard Fitting	機台重量 Weight
AE-260	1/8" - 1" 3-25mm	3/8" - 1" 10-24mm	110V-120V 220V-240V	1-1/2	698 416 106 63 504 300 77 46	100mm	100mm	15mm	180°	200×112 mm	1500kgs	510 mm	6	3	35kgs

選購配件

OPTIONAL SPARE PARTS



切削油器組 Coolant Tank Set	
型號 Model	重量 Weight
DT-90	0.5kgs



穴鑽柄組 Broach Holder		
刀具孔 Borer hole	穿孔徑 Hole Capacity	重量 Weight
19mm	18~40mm	1 kgs

上述之規格與形體可加以進行變更而無須事前通知
These specifications and the shape may be changed for improvement without prior notice.